



with Hycrete®

The complete integral concrete waterproofing system!

Increase Profits with the opportunity to remove Build Green by eliminating the need for the membrane installation step accelerating construction schedules

Reduce Risks with our integral system which reduces the risk of leaks and repairs associated with moisture penetration due to faulty or damaged membrane systems

Permanent waterproofing with minimal long term maintenance costs



Repelex with Hycrete® Standard Concrete

Which would you prefer?

petroleum based membrane product which are often applied using high voc adhesiveswhich can end up in landfills after demolition

Reduce the Potential for Accidents by eliminating the need for a subcontractor on the job


No Irritating Fumes omitted during the finishing process

Full Service Package which includes; plan review, optimized Repelex with Hycrete mix design, site inspection, and a ten-year performance base warranty

Reduce Weather Delays as integral waterproofing is less sensitive than membrane installation to rain

Project Profiles

Masterpark Garage

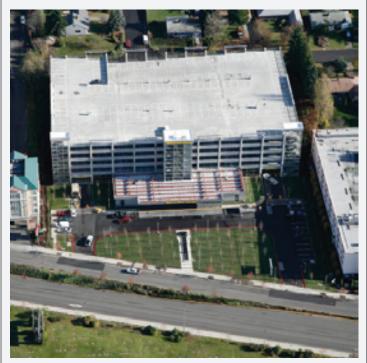

From an installation standpoint Repelex with Hycrete is the best waterproof mix I have installed. Repelex with Hycrete pumps like normal concrete, it finishes as well as typical concrete, but best of all it is odorless. This is a real advantage over competitor's products. I would recommend Repelex with Hycrete to any contractor looking for an integral waterproof concrete.

Mike Jones, Superintendent PCL Construction Services, Inc.

Amgen Garage



I loved Repelex concrete. The waterproof concrete was very user friendly and had no odors. We even saved a step at the elevator pit walls by eliminating the need for a membrane. This saved us a lot of time. Cadman and the Hycrete team provided great onsite assistance. I will be looking for future opportunities to use Repelex water-proof concrete

Pat Cregan, Superintendent Skanska USA Building Inc.

Applications

Repelex with Hycrete® can be used in many different applications including: shotcrete, parking decks, swimming pools, fish ponds, detention vaults, slab on grades, green roofs, elevators pits and more. Contact your Cadman sales representative to determine if Repelex with Hycrete® is the right mix design to meet your needs.

Submittal Information

Avg. Strength 5,000PSI @ 28 Days - 6,000 PSI @ 56 Days
Water to Cement Ratio .40
Shrinkage Less than .04
British Absorption (1881-122) Less than 1%
Slump 6"+/- 1"
Fiber Reinforcement Fibermesh® 300
*Performance Based Warranty 10 Years

^{*10-}year performance based warranty provided by Hycrete® Inc. Purchaser or purchaser's contractor, subcontractor, employee or agent must fully comply with Cadman and Hycrete® specifications and requirements to be eligible.



