


FRAME AND COVER:




ADJUSTING RINGS:




ADJUSTING RINGS AVAILABLE
IN 50mm, 100mm, AND 150mm

REDUCER:



REDUCERS AVAILABLE:
1050mm/635mm x 0.2m FLAT REDUCER
1050mm/635mm x 0.92m CONICAL TOP
1200mm/635mm x 0.2m FLAT REDUCER
1200mm/635mm x 0.91m CONICAL TOP

RISERS:

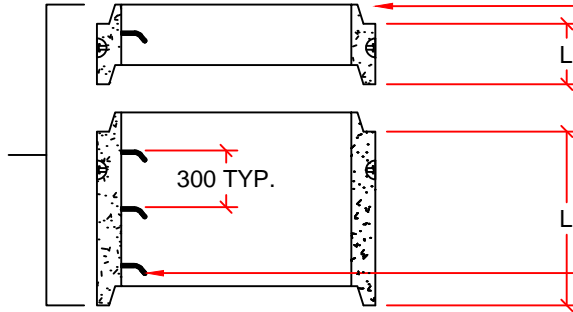


SINGLE OFFSET JOINT WITH
SUPERSEAL GASKET

RISERS AVAILABLE IN
0.31m, 0.46m, 0.61m, 0.92m,
1.22m, AND 1.83m HEIGHTS

19mm Ø RUNGS
@ 300 O/C

REDUCER:



LID THICKNESS

CONCRETE FLOOR
CAN BE:
FIELD CAST: TYPE A
OR
PRECAST: TYPE A1
OR
PREBENCHED




Inside Diameter

SPIGOT LENGTH

WALL THICKNESS

BASES AVAILABLE IN
0.46m, 0.61m, 0.92m,
1.22m, AND 1.83m HEIGHTS



BASE THICKNESS

INSIDE DIAMETER		WEIGHT (kg/m)	SPIGOT LENGTH (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	LID THICKNESS (mm)	BASE THICKNESS (mm)
NOMINAL (mm)	ACTUAL (mm)						
1350	1372	1623	108	1651	140	318	200
1500	1524	1968	121	1830	152	331	200
1650	1676	2346	127	2007	166	337	200
1800	1829	3063	127	2222	197	337	200
2100	2134	3651	127	2540	222	337	200
2400	2438	5665	127	2934	248	407	280
2700	2743	6210	149	3289	273	429	280
3000	3048	7010	152	3606	279	422	280

DRAWN BY:	SAM HAN
SCALE:	NTS
DATE:	NOVEMBER 12, 2015
DRAWING #:	LARGE DIA. MH DETAILS
REVISION #:	REV. 1
CHECKED BY:	TYSON DYCK

TYPICAL LARGE DIAMETER
MANHOLE DETAILS

DIMENSIONS IN mm
MANHOLE DETAIL TABLE

INLAND
Pipe

3000 10th AVE. REGINA, SK.
PH: 204 334-4300 FAX: 204 334-7957